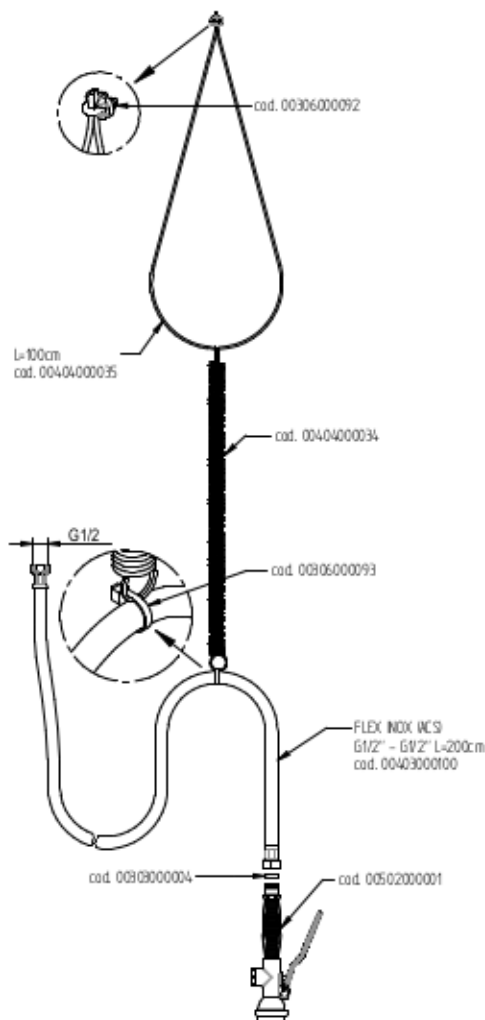


CARATTERISTICHE TECNICHE - TECHNICAL CHARACTERISTICS
 CARACTERÍSTICAS TÉCNICAS - CARACTÉRISTIQUES TECHNIQUES

 Articolo / Item
 Artículo / Article

R08A3010101

 Kit doccia sospesa , flessibile inox ACS L=200cm
 Hanging shower kit with ACS marked flexible hose L=200cm
 Kit ducha en suspenso con manguera ACS L=200cm
 Kit douchette suspendue avec flexible ACS L=200cm


Pressione di alimentazione / Operating pressure / Presión de alimentación / Pression d'alimentation	0,5 - 7 bar
Pressione raccomandata / Recommended pressure / Presión recomendada / Pression recommandée	3 bar
Temperatura di alimentazione / Water temperature / Temperatura de alimentación / Température d'alimentation	5 - 85 °C
Portata / Flow rate / Tasa de flujo / Débit	~ 11,5 l/min (3 bar)
Composizione / Composition / Composición / Composition	Corpo doccia in ottone cromato / Chromed brass body shower / Cuerpo ducha en latón cromado / Corps poignée en laiton chromé